



**FlexScan®**  
Business Monitor Solutions

CHOOSE EIZO







CHOOSE EIZO WORK BETTER















Workplace



Home Office



# The FlexScan Solution for a Better Working Experience

	Premium			New Standard			Basic								
	<ul style="list-style-type: none"> <li>I need a stable network connection for web meetings <i>See page 7</i></li> <li>I need to use multiple monitors with less cable clutter <i>See page 6</i></li> <li>Having my battery always fully charged allows me to focus on work <i>See page 7</i></li> <li>I prefer to work with an external mouse and keyboard when using my laptop <i>See page 7</i></li> </ul>			<p>I'm using a desktop PC and need a good monitor</p>											
	<p>Eye care and ergonomics are important to me <i>See pages 10 - 12</i></p>														
	<p>I want to brighten the office to improve the ambience <i>See pages 8 - 9</i></p>														
Inputs	USB Type-C®	✓	✓	✓	✓	✓	✓								
	• Network Connection	✓	✓	✓											
	• Daisy Chain		✓	✓											
	• Power Delivery	✓	✓	✓	✓	✓	✓								
	• Connect Peripherals	✓	✓	✓	✓	✓	✓								
	DisplayPort	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	HDMI	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	DVI-D							✓	✓	✓	✓	✓	✓		
	D-Sub									✓	✓	✓	✓	✓	✓
Eye Care Functions	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Color / Frameless	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
USB Ports	4	4	4	2	2	4	4	4	2	4	2	2	2	2	
Panel Size	37.5"	27"	24.1"	31.5"	27"	23.8"	27"	24.1"	24.1"	23.8"	23.8"	23.8"	22.5"	22.5"	
Native Resolution	UWQHD+ 3840×1600	WQHD 2560×1440	WUXGA 1920×1200	4K 3840×2160	4K 3840×2160	Full HD 1920×1080	WQHD 2560×1440	WUXGA 1920×1200	WUXGA 1920×1200	Full HD 1920×1080	Full HD 1920×1080	Full HD 1920×1080	WUXGA 1920×1200	WUXGA 1920×1200	WUXGA 1920×1200
	<b>NEW</b>  EV3895	<b>NEW</b>  EV2795	<b>NEW</b>  EV2495	 EV3285	 EV2785	<b>NEW</b>  EV2480	 EV2760	 EV2457	 EV2456	 EV2460	 EV2451	 EV2360			

See pages 18 - 21 for a detailed list and specifications of the complete FlexScan lineup, including square and wide monitors.

# Streamlined Connection with USB Type-C



## Power Delivery



Power delivery via USB Type-C reliably charges laptops and small desktop PCs. This eliminates the need for a laptop's bulky power supply unit, freeing up desk space.

Compatible Models EV3895 / EV2795 / EV2495 / EV3285 / EV2785 / EV2480




## A Better Working Experience

USB Type-C compatible monitors make it faster and easier to connect a laptop when moving between workstations, or when working away from the office.


[Visit Our Website](#) | Infographic: "What is USB Type-C?" 



## Daisy Chain

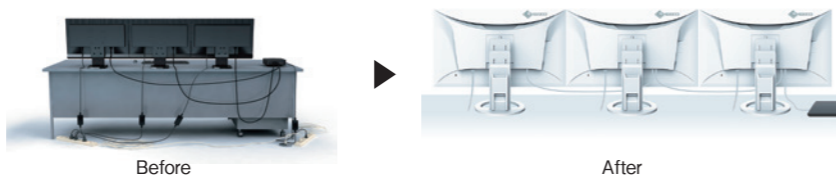With a daisy chain users can connect multiple monitors via a single video signal output. Connecting monitors in daisy chain simplifies cable management, tidying up the back of the desk for an even cleaner office aesthetic.



Compatible Models EV2795 / EV2495




[Visit Our Website](#) | What do I need to know about daisy chaining? 

## Network Connection

While many modern laptops are not equipped with a dedicated LAN port, a USB Type-C compatible monitor with a built-in LAN adapter provides users with access to the network via the monitor. This allows users to conduct conference calls or data transfers reliably and at high speed.

Compatible Models EV3895 / EV2795 / EV2495



## Connect Peripherals

Laptops often have limited connectivity options for peripherals. Connecting to a USB Type-C compatible monitor gives access to a hub with multiple USB Type-A ports for easily connecting an external keyboard, mouse, web camera, or storage device.

Compatible Models EV3895 / EV2795 / EV2495 / EV3285 / EV2785 / EV2480





# Bask in Beauty




## Frameless

### Bezels that are Barely There

These monitors are virtually frameless. Even with the black borders along the perimeter of the LCD there is very little distance between the display area of each screen in a multi-monitor configuration which makes for almost seamless viewing.


### Minimalist Front Surface Design

EIZO's no-compromises approach to design and functionality ensures the switches on the front of the monitor are easy to operate. Even with the minimalist front bezel, we achieved frameless design which incorporates an auto brightness sensor along with power and setting control switches by miniaturizing all these components.

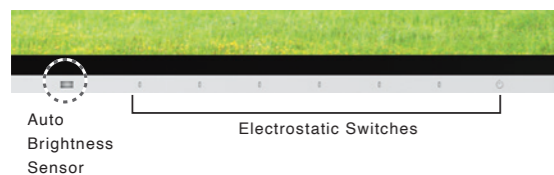


**Visualize your Workspace with AR**


Scan the QR code using your iPhone or iPad to see how EIZO fits into your workspace with augmented reality.



EV3895



EV2795



EV2495

## A Natural Beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern. EIZO uses its expertise cultivated from extensive years of research to manufacture its monitor cabinets with a smooth, uniform color and texture without using paint.




## Elegant from Front to Back

### White Cables for a White Cabinet

The aesthetically-pleasing design of the monitor extends to the cables. White cables come bundled with the white cabinet option for full color coordination.

### Cable Management

To keep your desktop tidy, a cable holder and/or a cable cover are included.

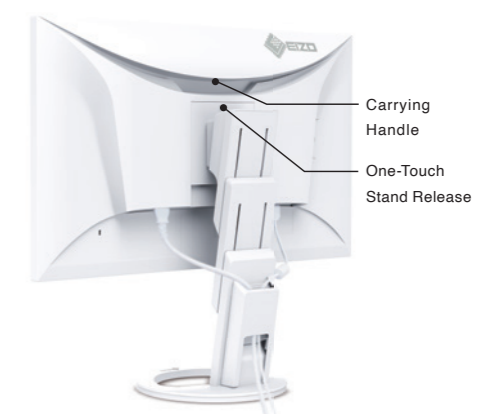







# Say Goodbye to Tired Eyes

## Blue Light Reduction

### Paper Mode

Do you find that your screen is often too bright to read text comfortably? FlexScan monitors are equipped with Paper Mode which reduces blue light to simulate paper, making it less straining on your eyes. When used in conjunction with the Auto EcoView function, blue light is even further reduced.


- Brightness
- Contrast Ratio
- + Low Color Temperature

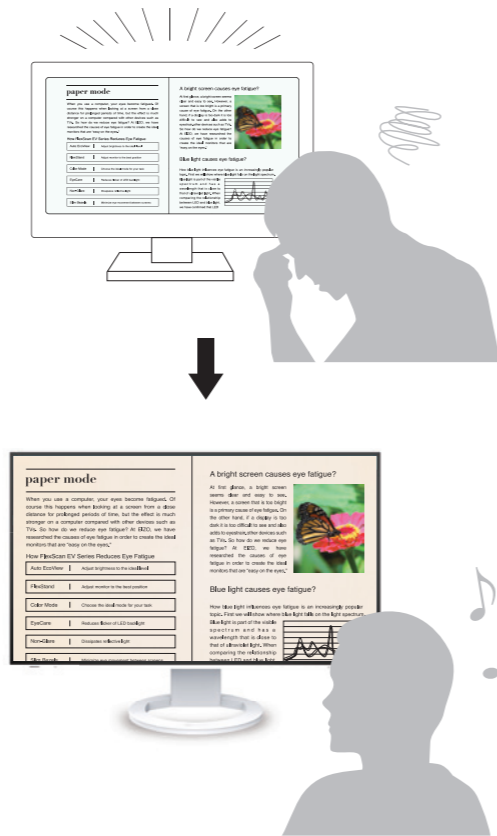

## Auto Brightness Control

### Always the Ideal Brightness

The Auto EcoView function automatically adjusts the brightness of your monitor according to ambient lighting. This ensures your monitor is always at the optimal brightness for reducing eye fatigue.

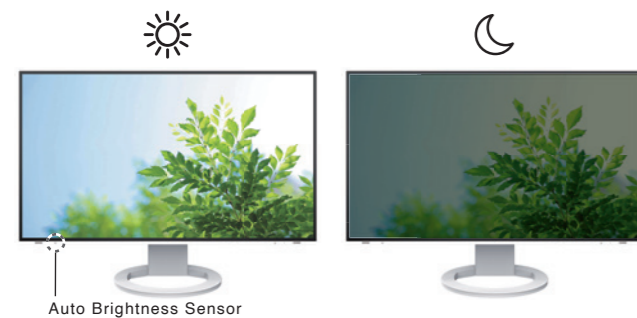

## Flicker-Free Viewing

### EyeCare Dimming Mode

In low brightness ranges, users may perceive flicker on a typical LED backlight, causing eye fatigue and often headaches. EyeCare is a dimming function that cuts flicker to a degree that human eyes cannot detect, reducing eye fatigue and flicker-related headaches, without affecting color stability of the monitor.

FlexScan monitors are certified by TÜV Rheinland to have low blue light and be flicker-free.



## Stable Image Even at Low Brightness

### Reduce Brightness to Approximately 1 cd/m<sup>2</sup>


Frameless and wide monitors can be adjusted to a brightness of approximately 1 cd/m<sup>2</sup> without negatively impacting the color or stability of the screen.



## Glare Reduction

### Anti-Glare Coating

FlexScan monitors are treated with an anti-glare coating to reduce screen reflections caused by ambient lighting. The coating scatters incoming light, reducing the amount of light reflected into your eyes.

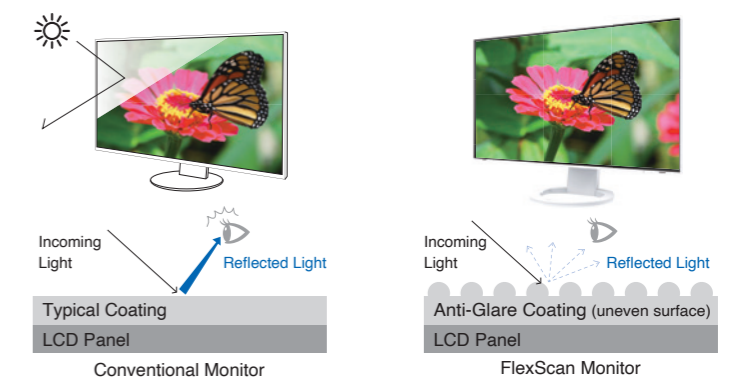

[Visit Our Website](#) | "The Latest on Computer Screens and Eye Fatigue"



# The Perfect Position




## Versatile Stand

The stands feature height adjustment, tilt and swivel, while saving space and remaining stylish. Quickly and smoothly adjust your monitor to the perfect position.

*The specific movement ranges of stands varies by model. See pages 18 - 21 for specifications of all monitors.*


### EV2795

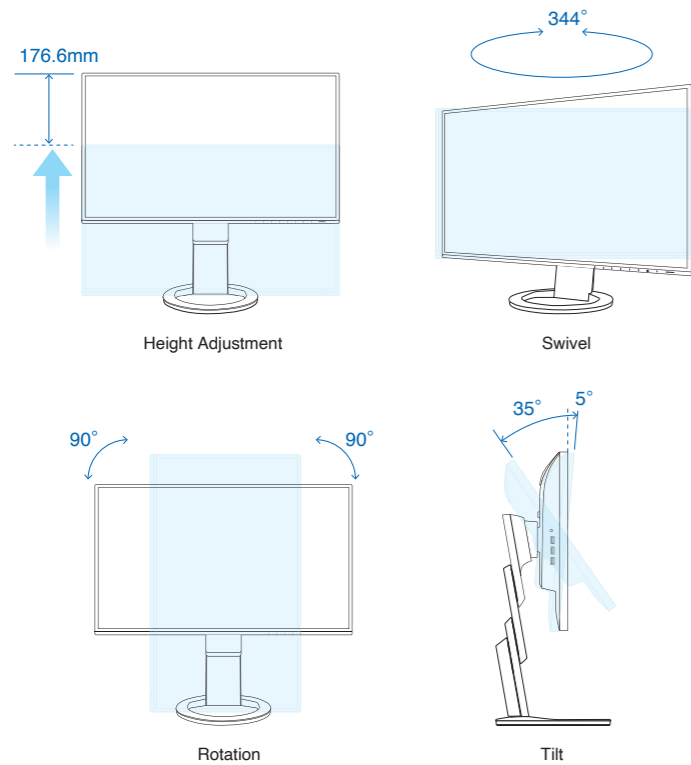

## Wide Height Adjustment Range

The ergonomic stand allows you to adjust the monitor to the most comfortable position suited for the workplace or home office.


*The specific movement ranges of stands varies by model. See pages 18 - 21 for specifications of all monitors.*

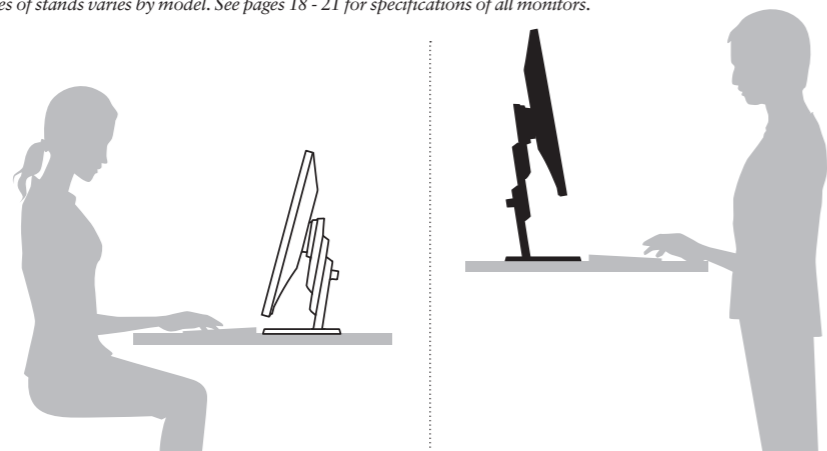

## Space-Saving Positioning

For the most limited workspaces, a laptop can fit comfortably under the monitor with the stand at maximum height. This allows you to use the laptop as a second screen without taking up valuable desktop space.


### EV2480

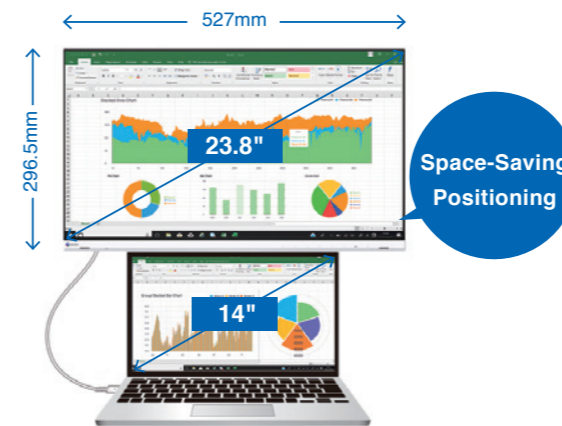

## Portrait Mode

View web pages and documents more easily by switching the monitor to portrait mode simply by rotating the screen.

*The specific movement range of stands varies by model. See pages 18 - 21 for specifications of all monitors.*

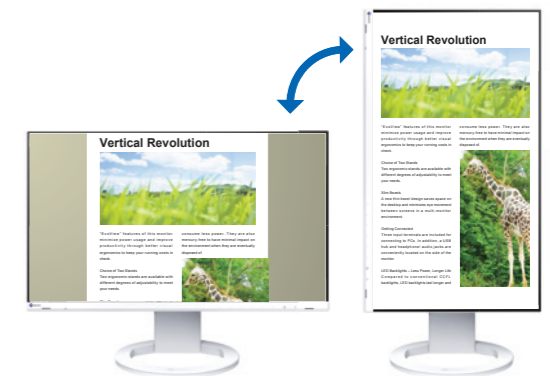

## Free Up Your Workspace

The PCSK-03 / PCSK-03R is a VESA-compliant bracket for easily mounting a client terminal such as a thin client or mini PC to the back of the monitor's stand. The space the client terminal previously occupied is now freed up so you can make better use of your desktop.

Even with the client terminal attached you can adjust the monitor's stand freely.


*Please check EIZO website for supported models.*



PCSK-03  
PCSK-03R  
Stand Bracket



Before

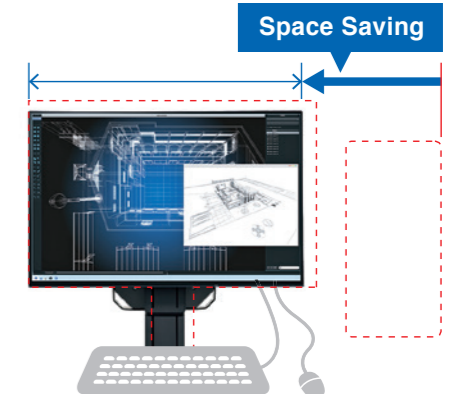


After

The stand has been tested with several companies' client terminals. When installed correctly the bracket does not interfere with the balance of the monitor so that even a heavy client terminal will not cause your monitor to overbalance.








# Intelligent Software to Work Better

## SCREEN INSTYLE

EIZO's free Screen InStyle software automatically optimizes your monitor to make your user environment more comfortable. See pages 18 - 21 for compatible monitors.

Compatible OS Windows 10 / 8.1

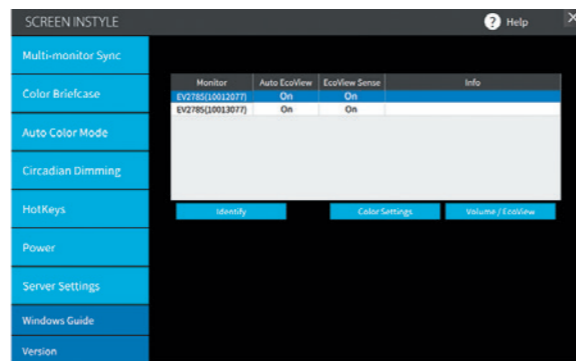

### Automatically Change the Color Mode for Each Application

#### Auto Color Mode


FlexScan monitors have multiple color modes designed for different uses. Use the Auto Color Mode to assign a color mode to turn on when using specific applications such as those for writing documents, photo viewing, creating illustrations or watching movies. When an application is opened the screen will automatically switch to the assigned color mode, making manual switching unnecessary.



### Take Your Settings with You

#### Color Briefcase


This function allows you to effortlessly maintain your individual screen preferences and take them with you, even to different monitors. Your settings are automatically reflected simply by connecting your laptop to a monitor supported by Screen InStyle. This is useful in environments with hot-desking or shared workspaces, providing enhanced comfort and work efficiency.

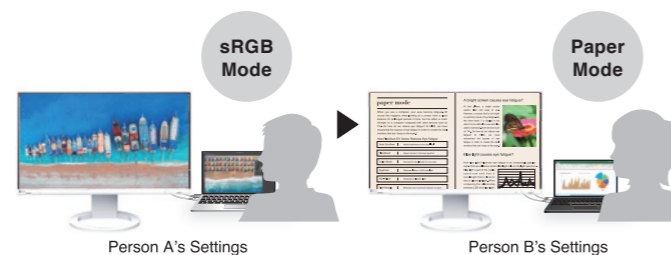

### Easily Switch Between Inputs / Color Modes

#### Assign Hotkeys for Switching Input Signals and Color Modes


You can assign keyboard hotkeys to switch between color modes or input signals of two PCs connected to your monitor.

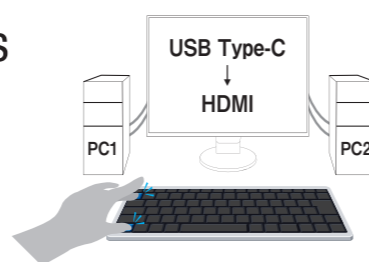

### Multi-Monitor Convenience


#### Synchronize Screen Adjustments

When using multiple monitors, save time by synchronizing all the monitors with each other. If you change the color mode, brightness or color temperature of one monitor, the rest will automatically change to the same.

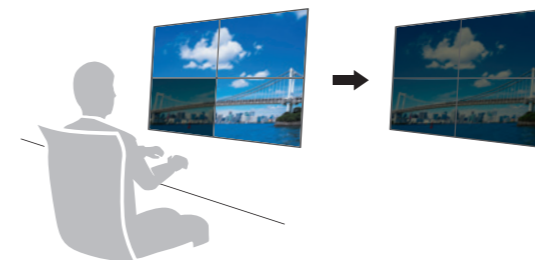

#### On/Off All at Once

When one monitor's power is turned off, all other monitors will also turn off. Save energy by easily turning off all monitors at once.

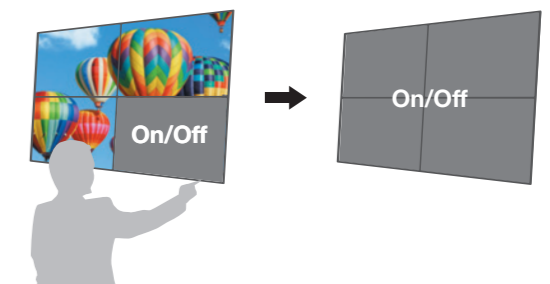


## Screen InStyle Server

### Effectively Monitor Asset Management

#### Automatically Receive Monitor or PC Information

With Screen InStyle Server receive information such as the model name and serial number of any monitor connected to your network. Additionally, see information from the computer that each monitor is connected to, such as the OS, IP address and computer name.

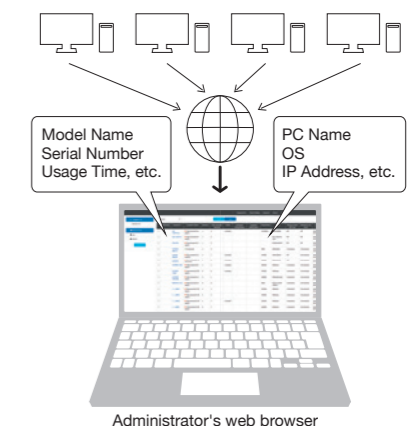

### Control Settings on Multiple Monitors at Once

#### Manage Multiple Monitors from One Location


Control multiple monitors' settings such as color mode, brightness, and eco functions from a remote location. Furthermore, prevent unintended setting changes by locking the operation switch.

#### Conserve Power with Central Management

Manage various power settings of networked PCs and monitors. Set the monitor to turn off or the PC to sleep after a set period of inactivity.

#### Improve Security with Automatic Locking

Improve office security by setting networked PCs to automatically lock after a certain period of inactivity. This ensures the PC remains secure after the user leaves their desk.

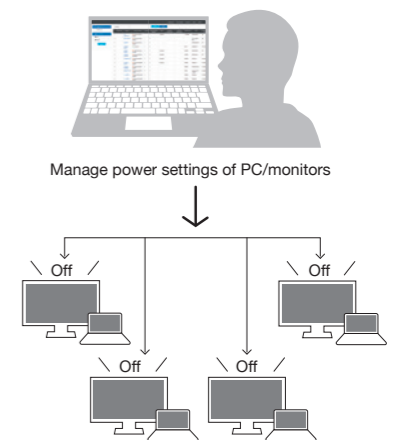

Download Screen InStyle and Screen InStyle Server

# Care for the Environment



## Our Contribution to SDGs

As part of its corporate social responsibility (CSR) activities, EIZO is contributing towards the United Nations' Sustainable Development Goals (SDGs). FlexScan are environmentally friendly monitors that are built with continually improved energy efficiency, made using recycled plastics and sustainable procured materials, boxed in recyclable packaging, and supported by a responsible after-service recycling system.

### Major activities:

- Increased the usage ratio of recycled plastics
- Increased the usage ratio of recycled materials in packaging
- Conducted a Life Cycle Assessment (LCA) of the FlexScan EV series
- Obtained ISO 50001 environmental management system certification




[Visit Our Website](#) | 
 [More on EIZO's CSR activities in the Integrated Report >>>](#)


## Major Sustainability Standards

EIZO's FlexScan frameless monitors are certified by worldwide comprehensive sustainability certifications such as EnergyStar, EPEAT, and TCO Certified Generation 8. This provides evidence to companies that need to verify conformance with their own procurement requirements according to ESG (environmental, social, and governance) investment or SDGs policy.



## Automatically Reduce Power Consumption

### Brightness Control with Auto EcoView

Auto EcoView automatically controls the brightness of the monitor to match ambient lighting. No more fiddling with brightness settings throughout the day, simply turn Auto EcoView on and save power while maintaining optimal visibility.



### Control the Backlight with EcoView Optimizer 2

Save more power with EcoView Optimizer 2, which reduces the brightness of the backlight according to the content being displayed, all while maintaining maximum visibility. *Excludes EV2730Q, S1934, S1703-A, and S1503-A.*



## Eco-Friendly Packing Customization

EIZO offers corporate customers an option for collective packing, where multiple monitors can be packed together in a single box. This lowers environmental impact by reducing packing materials used for a single shipment.



# Warranty and Accessories

## Warranty

### Five-Year Warranty

A 5-year manufacturer's warranty covers all components including the LCD panel to ensure a long service life.



### Zero Bright Pixels

EIZO guarantees zero bright sub-pixels for six months from the purchase date. *See pages 18 - 21 for applied models.*



## Accessories

*Please check the EIZO website for supported models.*

### Wall Mount Arm

The LA-011-W is a single-axis arm with a minimum profile and tilt/swivel.



### Protection Panels

These panels protect against dust and scratches. They come in reversible glossy and anti-glare sides.



### Screen Cleaner Kit

Keep your screen free from dust and fingerprints with this screen cleaner kit. Includes pump spray and cloth.





# FlexScan

			Premium		New Standard					
			EV3895		EV2795		EV2495		EV3285	
Model Variations	With Stand Black Gray White Without Stand Black Gray White	EV3895-BK EV3895-WT EV3895-FBK EV3895-FWT EV2795-BK EV2795-WT EV2795-FBK EV2795-FWT EV2495-BK EV2495-WT EV2495-FBK EV2495-FWT EV3285-BK EV3285-WT EV3285-FBK EV3285-FWT								
Panel	Type Backlight Size Native Resolution Viewable Image Size (H x V) Pixel Pitch / Pixel Density Display Colors Viewing Angles (H / V, typ.) Brightness (typ.) Contrast Ratio (typ.) Response Time (typ.)	IPS LED 37.5" / 95.3 cm 3840 x 1600 (24:10 aspect ratio) 879.7 x 366.5 mm 0.229 x 0.229 mm / 111 ppi 16.77 million 178° / 178° 300 cd/m² 1000:1 5 ms (gray-to-gray)	IPS LED 27" / 68.5 cm 2560 x 1440 (16:9 aspect ratio) 596.7 x 335.7 mm 0.233 x 0.233 mm / 109 ppi 16.77 million 178° / 178° 350 cd/m² 1000:1 5 ms (gray-to-gray)	IPS LED 24.1" / 61.1 cm 1920 x 1200 (16:10 aspect ratio) 518.4 x 324 mm 0.270 x 0.270 mm / 94 ppi 16.77 million 178° / 178° 350 cd/m² 1000:1 5 ms (gray-to-gray)	IPS LED 27" / 80 cm 3840 x 2160 (16:9 aspect ratio) 697.3 x 392.2 mm 0.182 x 0.182 mm / 140 ppi 16.77 million 178° / 178° 350 cd/m² 1300:1 5 ms (gray-to-gray)					
Video Signals	Input Terminals Output Terminals Digital Scanning Frequency (H / V) Analog Scanning Frequency (H / V) Sync Formats	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2 - USB Type-C: 31 - 99 kHz / 29 - 31 Hz, 59 - 61 Hz DisplayPort: 31 - 99 kHz / 29 - 31 Hz, 59 - 61 Hz HDMI: 31 - 99 kHz / 29 - 31 Hz, 49 - 51 Hz, 59 - 61 Hz - -	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) USB Type-C (daisy chain) USB Type-C: 31 - 89 kHz / 59 - 61 Hz DisplayPort: 31 - 89 kHz / 59 - 61 Hz HDMI: 31 - 89 kHz / 49 - 51 Hz, 59 - 61 Hz -	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) USB Type-C (daisy chain) USB Type-C: 31 - 76 kHz / 59 - 61 Hz DisplayPort: 31 - 76 kHz / 59 - 61 Hz HDMI: 15 - 76 kHz / 49 - 51 Hz, 59 - 61 Hz -	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2 - USB Type-C: 31 - 134 kHz / 29 - 31 Hz, 59 - 61 Hz DisplayPort: 31 - 134 kHz / 29 - 31 Hz, 59 - 61 Hz HDMI: 31 - 135 kHz / 29 - 31 Hz, 49 - 61 Hz -					
USB	Upstream Downstream USB LAN Adapter	USB 3.1 Gen 1: Type-B x 2, USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 85 W max.) USB 3.1 Gen 1: Type-A x 4 RJ-45 (1000BASE-T) Windows 10 / 8.1 (64-bit, 32-bit), macOS Sierra (10.12) or later 1.0 W + 1.0 W	USB 3.1 Gen 1: Type-B, USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 70 W max.) USB 3.1 Gen 1: Type-A x 3, USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 15 W max.) RJ-45 (1000BASE-T) Windows 10 / 8.1 (64-bit, 32-bit), macOS Sierra (10.12) or later 1.0 W + 1.0 W	USB 3.1 Gen 1: Type-B, USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 70 W max.) USB 3.1 Gen 1: Type-A x 2 (Battery Charging 10.5 W max. x 1) RJ-45 (1000BASE-T) Windows 10 / 8.1 (64-bit, 32-bit), macOS Sierra (10.12) or later 1.0 W + 1.0 W	USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 60 W max.) USB 3.1 Gen 1: Type-A x 2 (Battery Charging 10.5 W max. x 1) -					
Audio	Speakers Output Terminals	1.0 W + 1.0 W Headphones (Stereo mini jack)	1.0 W + 1.0 W Headphones (Stereo mini jack)	1.0 W + 1.0 W Headphones (Stereo mini jack)	1.0 W + 1.0 W Headphones (Stereo mini jack)					
Power	Power Requirements Typical Power Consumption Maximum Power Consumption Power Save Mode	AC 100 - 240 V, 50 / 60 Hz 28 W 194 W 0.5 W or less	AC 100 - 240 V, 50 / 60 Hz 16 W 164 W 0.5 W or less	AC 100 - 240 V, 50 / 60 Hz 11 W 156 W 0.5 W or less	AC 100 - 240 V, 50 / 60 Hz 32 W 163 W 0.5 W or less					
Features & Functions	Preset Modes Auto EcoView	User1, User2, sRGB, Paper, Movie, DICOM Yes	User1, User2, sRGB, Paper, Movie, DICOM Yes	User1, User2, sRGB, Paper, Movie, DICOM Yes	User1, User2, sRGB, Paper, Movie, DICOM Yes					
Physical Specifications	Dimensions (Landscape, W x H x D) Dimensions (Without Stand, W x H x D) Net Weight Net Weight (Without Stand) Height Adjustment Range Tilt Swivel Pivot Hole Spacing (VESA Standard)	893.9 x 411 - 603.7 x 240 mm 893.9 x 398.2 x 109.8 mm 13.2 kg 9.5 kg 192.7 mm 35° Up, 5° Down 70° -	611.4 x 368.6 - 545.2 x 230 mm 611.4 x 356.6 x 56 mm 8.5 kg 5.7 kg 176.6 mm 35° Up, 5° Down 344° 90° (both clockwise and counter clockwise)	531 x 356.2 - 538.4 x 230 mm 531 x 344.2 x 53.7 mm 7.6 kg 4.9 kg 182.2 mm 35° Up, 5° Down 344° 90° (both clockwise and counter clockwise)	717.4 x 427.3 - 576.2 x 230 mm 717.4 x 416.3 x 51.5 mm 11.0 kg 7.6 kg 148.9 mm 35° Up, 5° Down 344° 90° (clockwise)					
Certifications & Standards <small>(Please contact EIZO for the latest information.)</small>		TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade1, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade1, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC					
Dedicated Software	Monitor Control Utility Screen InStyle	Supported	Supported	Supported	Supported					
Supplied Accessories	Signal Cables Others	USB Type-C (2 m), DisplayPort (2 m), HDMI (2 m) AC power cord (2 m), USB Type-A - USB Type-B cable (2 m) x 2, connector cover, VESA mounting screw x 4, setup guide	USB Type-C (2 m) AC power cord (2 m), VESA mounting screw x 4, setup guide	USB Type-C (2 m) AC power cord (2 m), VESA mounting screw x 4, setup guide	USB Type-C (2 m), DisplayPort (2 m), HDMI (2 m) AC power cord (2 m), cable cover (EV3285), VESA mounting screw x 4, setup guide					
Warranty <sup>1</sup>		Five Years	Five Years	Five Years	Five Years					
Zero Bright Pixels <sup>2</sup>		Yes	Yes	Yes	Yes					
Dimension Diagrams (Unit: mm)										



			New Standard		Basic						
			EV2785		EV2480		EV2760		EV2457		EV2456
Model Variations	With Stand Black Gray White Without Stand Black Gray White	EV2785-BK EV2785-WT EV2785-FBK EV2785-FWT EV2480-BK EV2480-WT EV2480-FBK EV2480-FWT EV2760-BK EV2760-WT EV2760-FBK EV2760-FWT EV2457-BK EV2457-WT EV2457-FBK EV2457-FWT EV2456-BK EV2456-WT EV2456-FBK EV2456-FWT									
Panel	Type Backlight Size Native Resolution Viewable Image Size (H x V) Pixel Pitch / Pixel Density Display Colors Viewing Angles (H / V, typ.) Brightness (typ.) Contrast Ratio (typ.) Response Time (typ.)	IPS LED 27" / 68.5 cm 3840 x 2160 (16:9 aspect ratio) 596.7 x 335.7 mm 0.155 x 0.155 mm / 163 ppi 16.77 million 178° / 178° 350 cd/m² 1000:1 5 ms (gray-to-gray)	IPS LED 23.8" / 60.5 cm 1920 x 1080 (16:9 aspect ratio) 527 x 296.5 mm 0.275 x 0.275 mm / 93 ppi 16.77 million 178° / 178° 250 cd/m² 1000:1 5 ms (gray-to-gray)	IPS LED 27" / 68.5 cm 2560 x 1440 (16:9 aspect ratio) 596.7 x 335.7 mm 0.270 x 0.270 mm / 109 ppi 16.77 million 178° / 178° 350 cd/m² 1000:1 5 ms (gray-to-gray)	IPS LED 24.1" / 61.1 cm 1920 x 1200 (16:10 aspect ratio) 518.4 x 324 mm 0.270 x 0.270 mm / 94 ppi 16.77 million 178° / 178° 350 cd/m² 1000:1 5 ms (gray-to-gray)	IPS LED 24.1" / 61.1 cm 1920 x 1200 (16:10 aspect ratio) 518.4 x 324 mm 0.270 x 0.270 mm / 94 ppi 16.77 million 178° / 178° 350 cd/m² 1000:1 5 ms (gray-to-gray)					
Video Signals	Input Terminals Output Terminals Digital Scanning Frequency (H / V) Analog Scanning Frequency (H / V) Sync Formats	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2 - USB Type-C: 31 - 134 kHz / 29 - 31 Hz, 59 - 61 Hz DisplayPort: 31 - 134 kHz / 29 - 31 Hz, 59 - 61 Hz HDMI: 31 - 135 kHz / 29 - 31 Hz, 49 - 61 Hz -	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) - USB Type-C: 31 - 68 kHz / 59 - 61 Hz DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 31 - 68 kHz / 49 - 51 Hz, 59 - 61 Hz -	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2 - USB Type-C: 31 - 89 kHz / 59 - 61 Hz DisplayPort: 31 - 89 kHz / 59 - 61 Hz HDMI: 31 - 89 kHz / 29 - 31 Hz, 49 - 51 Hz, 59 - 61 Hz -	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4) DisplayPort (daisy chain) DisplayPort: 31 - 76 kHz / 59 - 61 Hz HDMI: 15 - 76 kHz / 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 76 kHz / 59 - 61 Hz -	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2 - USB Type-C: 31 - 76 kHz / 59 - 61 Hz DisplayPort: 31 - 76 kHz / 59 - 61 Hz HDMI: 15 - 76 kHz / 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 76 kHz / 59 - 61 Hz -					
USB	Upstream Downstream USB LAN Adapter	USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 60 W max.) USB 3.1 Gen 1: Type-A x 2 (Battery Charging 10.5 W max. x 1) -	USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 70 W max.) USB 3.1 Gen 1: Type-A x 4 -	USB 3.1 Gen 1: Type-B USB 3.1 Gen 1: Type-A x 4 -	USB 3.1 Gen 1: Type-B USB 3.1 Gen 1: Type-A x 4 -	USB 3.1 Gen 1: Type-B USB 3.1 Gen 1: Type-A x 2 -					
Audio	Speakers Output Terminals	1.0 W + 1.0 W Headphones (Stereo mini jack)	1.0 W + 1.0 W Headphones (Stereo mini jack)	1.0 W + 1.0 W Headphones (Stereo mini jack)	1.0 W + 1.0 W Headphones (Stereo mini jack)	1.0 W + 1.0 W Headphones (Stereo mini jack)					
Power	Power Requirements Typical Power Consumption Maximum Power Consumption Power Save Mode	AC 100 - 240 V, 50 / 60 Hz 11 W 163 W 0.5 W or less	AC 100 - 240 V, 50 / 60 Hz 11 W 142 W 0.5 W or less	AC 100 - 240 V, 50 / 60 Hz 11 W 67 W 0.5 W or less	AC 100 - 240 V, 50 / 60 Hz 11 W 59 W 0.5 W or less	AC 100 - 240 V, 50 / 60 Hz 11 W 44 W 0.5 W or less					
Features & Functions	Preset Modes Auto EcoView	User1, User2, sRGB, Paper, Movie, DICOM Yes	User1, User2, sRGB, Paper, Movie, DICOM Yes	User1, User2, sRGB, Paper, Movie, DICOM Yes	User1, User2, sRGB, Paper, Movie, DICOM Yes	User1, User2, sRGB, Paper, Movie, DICOM Yes					
Physical Specifications	Dimensions (Landscape, W x H x D) Dimensions (Without Stand, W x H x D) Net Weight Net Weight (Without Stand) Height Adjustment Range Tilt Swivel Pivot Hole Spacing (VESA Standard)	611.4 x 367.3 - 545.2 x 230 mm 611.4 x 356.3 x 50 mm 8.2 kg 4.9 kg 177.9 mm 35° Up, 5° Down 344° 90° (clockwise)	537.8 x 332.4 - 523.6 x 230 mm 537.8 x 320.4 x 57.4 mm 7.4 kg 4.7 kg 191.2 mm 35° Up, 5° Down 344° 90° (both clockwise and counter clockwise)	611.7 x 376.3 - 545.3 x 230 mm 611.7 x 364.4 x 53.7 mm 8.5 kg 5.7 kg 156.9 mm 35° Up, 5° Down 344° 90° (both clockwise and counter clockwise)	531 x 353.3 - 510.1 x 190 mm 531 x 343.8 x 45.5 mm 5.8 kg 3.8 kg 158.6 mm 35° Up, 5° Down 344° 90° (both clockwise and counter clockwise)	531 x 351.4 - 510.1 x 190 mm 531 x 341.9 x 45.5 mm 5.7 kg 3.7 kg 158.6 mm 35° Up, 5° Down 344° 90° (both clockwise and counter clockwise)					
Certifications & Standards <small>(Please contact EIZO for the latest information.)</small>		TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade1, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC					
Dedicated Software	Monitor Control Utility Screen InStyle	Supported	Supported	Supported	Supported	Supported					
Supplied Accessories	Signal Cables Others	USB Type-C (2 m), DisplayPort (2 m), HDMI (2 m) AC power cord (2 m), cable cover (EV2785), VESA mounting screw x 4, setup guide	USB Type-C (2 m) AC power cord (2 m), setup guide	DisplayPort (2 m) AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide	DisplayPort (2 m) AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), cable cover (EV2457), VESA mounting screw x 4, CD-ROM (PDF user's manual), setup guide	DisplayPort (2 m) AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), cable cover (EV2456), VESA mounting screw x 4, CD-ROM (PDF user's manual), setup guide					
Warranty <sup>1</sup>		Five Years	Five Years	Five Years	Five Years	Five Years					
Zero Bright Pixels <sup>2</sup>		Yes	Yes	Yes	Yes	Yes					
Dimension Diagrams (Unit: mm)											

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. <sup>1</sup> Usage time is limited to 30,000 hours. <sup>2</sup> 6 months from the date of purchase.

# FlexScan®



Model Variations	With Stand	Black	EV2460-BK	EV2451-BK	EV2360-BK	EV2430-BK	EV2730Q-BK	S2133-HBK	S1934-HBK (Height Adjustable Stand) S1934-TBK (Tilt Stand)	S1703-AHBK (Height Adjustable Stand) S1703-ATBK (Tilt Stand)	S1503-ATBK
		Gray	-	-	-	EV2430-GY		S2133-HGY	S1934-HGY (Height Adjustable Stand) S1934-TGY (Tilt Stand)	S1703-AHGY (Height Adjustable Stand) S1703-ATGY (Tilt Stand)	S1503-ATGY
	Without Stand	White	EV2460-WT	EV2451-WT	EV2360-WT	-		-	-	-	-
		Black	EV2460-FBK	EV2451-FBK	EV2360-FBK	EV2430-FBK	EV2730Q-FBK	S2133-FBK	S1934-FBK	S1703-AFBK	S1503-AFBK
		Gray	-	-	-	EV2430-FGY	EV2730Q-FGY	S2133-FGY	S1934-FGY	S1703-AFGY	S1503-AFGY
		White	EV2460-FWT	EV2451-FWT	EV2360-FWT	-	-	-	-	-	-
Panel	Type		IPS	IPS	IPS	IPS	IPS	IPS	IPS	TN	TN
	Backlight		LED	LED	LED	LED	LED	LED	LED	LED	LED
	Size		23.8" / 60.5 cm	23.8" / 60.4 cm	22.5" / 57.2 cm	24.1" / 61.1 cm	26.5" / 67 cm	21.3" / 54 cm	19" / 48 cm	17" / 43.3 cm	15" / 38 cm
	Native Resolution		1920 x 1080 (16: 9 aspect ratio)	1920 x 1080 (16: 9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1920 (1:1 aspect ratio)	1600 x 1200 (4:3 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1024 x 768 (4:3 aspect ratio)
	Viewable Image Size (H x V)		527 x 296.5 mm	527 x 296.5 mm	488.2 x 297.2 mm	518.4 x 324 mm	475.7 x 475.7 mm	432 x 324 mm	374.8 x 299.8 mm	337.9 x 270.3 mm	304.1 x 228.1 mm
	Pixel Pitch / Pixel Density		0.275 x 0.275 mm / 93 ppi	0.275 x 0.275 mm / 93 ppi	0.254 x 0.248 mm / 101 ppi	0.270 x 0.270 mm / 94 ppi	0.248 x 0.248 mm / 103 ppi	0.270 x 0.270 mm / 94 ppi	0.293 x 0.293 mm / 87 ppi	0.264 x 0.264 mm / 96 ppi	0.297 x 0.297 mm / 86 ppi
	Display Colors		16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million
	Viewing Angles (H/V, typ.)		178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	170° / 160°	160° / 160°
	Brightness (typ.)		250 cd/m²	250 cd/m²	250 cd/m²	300 cd/m²	300 cd/m²	420 cd/m²	250 cd/m²	250 cd/m²	400 cd/m²
	Contrast Ratio (typ.)		1000:1	1000:1	1000:1	1000:1	1000:1	1500:1	1000:1	1000:1	1000:1
	Response Time (typ.)		5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	14 ms (gray-to-gray)	5 ms (gray-to-gray)	6 ms (gray-to-gray)	14 ms (gray-to-gray)	5 ms (black-white-black)	8 ms (black-white-black)
Video Signals	Input Terminals		DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4)	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DVI-D (HDCP 1.4), D-Sub mini 15 pin	DVI-D, D-Sub mini 15 pin
	Output Terminals		-	-	-	-	-	-	-	-	-
	Digital Scanning Frequency (H / V)		DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51, 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz	DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz	DisplayPort: 31 - 75.5 kHz / 59 - 61 Hz HDMI: 31 - 75.5 kHz / 49 - 51 Hz, 59 - 61 Hz	31 - 76 kHz / 59 - 61 Hz	31 - 127 kHz / 59 - 61 Hz	31 - 76 kHz / 59 - 61 Hz	31 - 64 kHz / 59 - 61 Hz	31 - 64 kHz / 59 - 61 Hz	31 - 49 kHz / 59 - 61 Hz
	Analog Scanning Frequency (H / V)		31 - 68 kHz / 59 - 61 Hz	31 - 81 kHz / 55 - 76 Hz	31 - 75.5 kHz / 59 - 61 Hz	31 - 76 kHz / 55 - 61 Hz	-	24 - 80 kHz / 49 - 76 Hz	31 - 64 kHz / 55 - 61 Hz	31 - 64 kHz / 55 - 61 Hz	31 - 49 kHz / 55 - 61 kHz
	Sync Formats		Separate	Separate	Separate	Separate	Separate	Separate, Composite	Separate	Separate	Separate
USB	Upstream		USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B	USB 3.1 Gen 1: Type-B	USB 2.0: Type-B	USB 2.0: Type-B	USB 2.0: Type-B	-	-	-
	Downstream		USB 3.1 Gen 1: Type-A x 4	USB 3.1 Gen 1: Type-A x 2	USB 3.1 Gen 1: Type-A x 2	USB 2.0: Type-A x 2	USB 2.0: Type-A x 2	USB 2.0: Type-A x 2	-	-	-
	USB LAN Adapter		-	-	-	-	-	-	-	-	-
Audio	Speakers		1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	-	0.5 W + 0.5 W	0.5 W + 0.5 W	0.5 W + 0.5 W
	Output Terminals		Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	-	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	-
Power	Power Requirements		AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz
	Typical Power Consumption		10 W	13 W	11 W	12 W	25 W	13 W	9 W	8 W	5 W
	Maximum Power Consumption		50 W	42 W	37 W	36 W	64 W	45 W	21 W	18 W	16 W
	Power Save Mode		0.5 W or less	0.5 W or less	0.5 W or less	0.3 W or less	0.5 W or less	0.3 W or less	0.5 W or less	0.5 W or less	0.5 W or less
Features & Functions	Preset Modes		User1, User2, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, Movie	User, sRGB, Paper, Movie, DICOM	User1, User2, sRGB, Paper, DICOM	User1, User2, sRGB, Paper	User1, User2, sRGB, Paper
	Auto EcoView		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Physical Specifications	Dimensions (Landscape, W x H x D)		537.8 x 333.6 - 473.6 x 233 mm	537.7 x 322.7 - 495.4 x 190 mm	499 x 333.9 - 473.9 x 233 mm	552.5 x 368 - 499 x 233 mm	497 x 512.5 - 613.5 x 245 mm	465 x 453 - 535 x 208.5 mm	S1934-H: 405 x 406.5 - 506.5 x 205 mm S1934-T: 405 x 414 x 205 mm	S1703-AH: 367 x 391.5 - 491.5 x 205 mm S1703-AT: 367 x 384 x 188 mm	346 x 349 x 157 mm
	Dimensions (Without Stand, W x H x D)		537.8 x 320.4 x 53.6 mm	537.7 x 313.1 x 45.5 mm	499 x 321.3 x 53.6 mm	552.5 x 358 x 56.9 mm	497 x 501.5 x 56 mm	465 x 361 x 64 mm	405 x 334 x 61.5 mm	367 x 304 x 59 mm	346 x 280 x 69 mm
	Net Weight		5.9 kg	5.5 kg	5.5 kg	6.7 kg	7.1 kg	8.6 kg	S1934-H: 5.6 kg, S1934-T: 4.6 kg	S1703-AH: 5.4 kg, S1703-AT: 4.4 kg	4.7 kg
	Net Weight (Without Stand)		3.8 kg	3.5 kg	3.4 kg	4.3 kg	4.2 kg	5.6 kg	3.8 kg	3.6 kg	3.4 kg
	Height Adjustment Range		140 mm	172.7 mm	140 mm	131 mm	101 mm	82 mm	S1934-H: 100 mm, S1934-T: -	S1703-AH: 100 mm, S1703-AT: -	-
	Tilt		35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	40° Up, 0° Down	S1934-H: 30° Up, 0° Down S1934-T: 30° Up, 5° Down	S1703-AH: 30° Up, 0° Down S1703-AT: 30° Up, 5° Down	30° Up, 0° Down
	Swivel		344°	344°	344°	344°	344°	35° Right / 35° Left	S1934-H: 35° Right / 35° Left, S1934-T: -	S1703-AH: 35° Right / 35° Left, S1703-AT: -	-
	Pivot		90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (clockwise)	-	90° (clockwise)	S1934-H: 90° (clockwise) S1934-T: -	S1703-AH: 90° (clockwise) S1703-AT: -	-
	Hole Spacing (VESA Standard)		100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Certifications & Standards (Please contact EIZO for the latest information.)			TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, PSE, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade3, EAC	TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade3, EAC	TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TÜV/Ergonomics, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC
Dedicated Software	Monitor Control Utility Screen InStyle		Supported	Supported	Supported	-	-	-	-	-	-
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables		DisplayPort (2 m)	DisplayPort (2 m)	DisplayPort (2 m)	DisplayPort (2 m), DVI-D (2 m)	DisplayPort (2 m), Dual Link DVI-D (2 m)	DVI-D (2 m), D-Sub mini 15 pin (1.8 m)	DVI-D (2 m), D-Sub mini 15 pin (1.8 m)	DVI-D (2 m), D-Sub mini 15 pin (1.8 m)	DVI-D (2 m), D-Sub mini 15 pin (1.8 m)
	Others		AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), cable cover (EV2451), VESA mounting screw x 4, CD-ROM (PDF user's manual), setup guide	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide	AC power cord (2 m), VESA mounting screw x 4 (EV2430-F), setup guide	AC power cord (2 m), Cable holder (EV2730Q), VESA mounting screw x 4 (EV2730Q-F), EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord (2 m), USB Type-A - USB Type-B cable (1.8 m), VESA mounting screw x 4 (S2133-F), EIZO LCD Utility Disk (PDF user's manual), ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software)	AC power cord (2 m), audio cable (2.1 m), VESA mounting screw x 4, CD-ROM (PDF user's manual), setup guide	AC power cord (2 m), audio cable (2.1 m), VESA mounting screw x 4, setup guide	AC power cord (2 m), audio cable (2.1 m), VESA mounting screw x 4 (S1503-AF), setup guide
Warranty <sup>1</sup>			Five Years	Five Years	Five Years	Five Years	Five Years	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels <sup>2</sup>			Yes	Yes	Yes	Yes	Yes	-	-	-	-

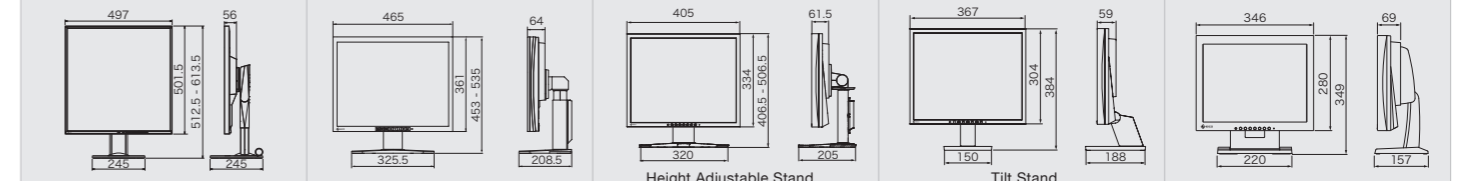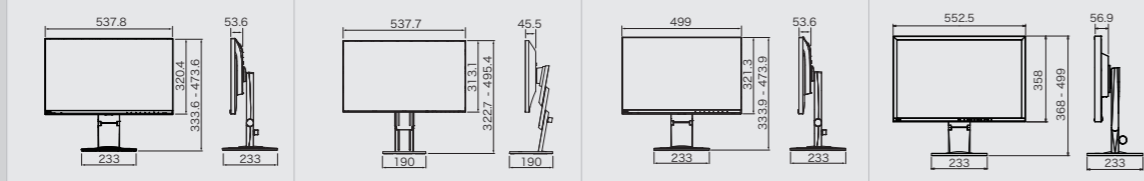

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. <sup>1</sup> Usage time is limited to 30,000 hours. <sup>2</sup> 6 months from the date of purchase.




Innovative Solutions

**Built-In Calibration Sensors**




Automatically calibrates while you work

**IP Decoding Solutions**

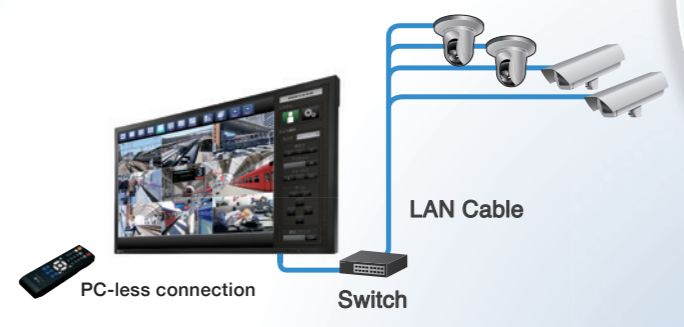

**In-House Optical Bonding**

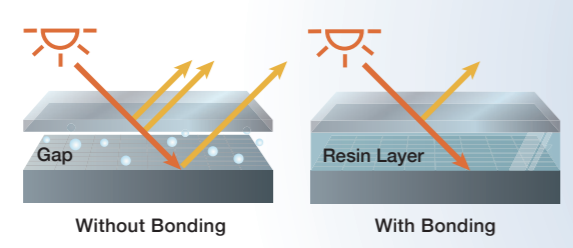


**Market-Focused Cloud Solutions**



**Software for Improved Workflow**



Use a single mouse across two PCs

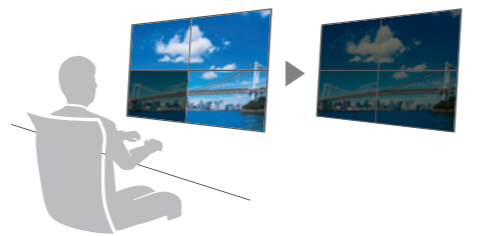

Synchronized adjustment of multiple monitors



Simplified CMS with automatic software and printer settings adjustment

**Visual Technology Company**



50+ Years of Expertise



Research and Development



Manufacturing




Quality Control



Customization



Global Reach

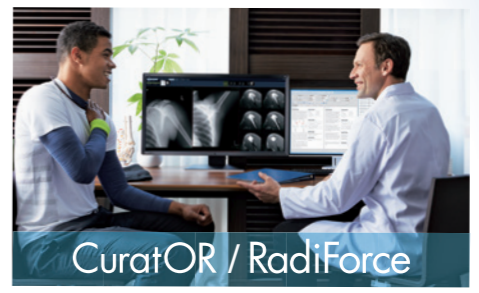

CuratOR / RadiForce

Healthcare



DuraVision

Security & Surveillance / Maritime



Raptor / Re/Vue / SafeGuard

Air Traffic Control



FORIS

Home Entertainment



FlexScan

Business Enterprise



ColorEdge

Creative Work

Extensive Market Reach

# EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan  
Phone +81-76-277-6794 Fax +81-76-277-6793

[www.eizoglobal.com](http://www.eizoglobal.com)

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, RadiForce, RadiCS, RadiNET, Curator, FlexScan, ColorEdge, DuraVision, FORIS, Raptor, and ScreenManager are registered trademarks of EIZO Corporation. EIZO Monitor Configurator, EIZO ScreenSlicer, Re/Vue, SafeGuard, Screen InStyle, and ScreenCleaner are trademarks of EIZO Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. VESA is a registered trademark of Video Electronics Standards Association. USB Type-C, USB-C are registered trademarks of USB Implementers Forum, Inc. iPad, iPhone, macOS Sierra are registered trademarks of Apple Inc. ENERGY STAR is a registered trademark of the United States Environmental Protection Agency in the United States and other countries. Some screen images are used with permission from Microsoft. Specifications are subject to change without notice.

Copyright © 2021 EIZO Corporation. All rights reserved. (210102)

